



# AC 1350 Wireless Dual Band Router Archer C60

### Highlights

- Brand New Wi-Fi Standard The advanced 802.11ac Wi-Fi gets your home network revolutionized
- Fast Wireless Concurrent 2.4GHz 450Mbps and 5GHz 867Mbps dual band Wi-Fi connections
- Superior Coverage Three 2.4GHz antennas and two 5GHz antennas are placed in alternate order for omni-directional coverage
- Advanced Functions Manage your router cleverly with Parental Control and Guest Network functions
- · Tether App Provides easy router management in your palm



450Mbps+ 867Mbps



Dual Band 2.4 & 5 GHz



G



Guest Network



Parental Control



TP-LINK Tether App



# Features



# Speed

- Fast Wireless Speed Combined wireless speeds up to 1.35Gbps at 2.4GHz & 5GHz bands concurrently
- · 802.11ac Wi-Fi Standard Offers 3 times faster data rate than 802.11n Wi-Fi in a single stream



### Wi-Fi Range

- Innovative Antennas Layout Three 2.4GHz antennas and two 5GHz antennas are placed in alternate order for omni-directional coverage
- · **High Gain** High gain external antennas enhance Wi-Fi range and stability



## Reliability

- Simultaneous Dual Band Reduces interference for more stable connections
- Single band antenna For more dedicated and stable wireless signals
- · IP QoS Advanced QoS automatically recognizes and prioritizes streaming & gaming applications

# Features



### Ease of Use

- One Button Connectivity Setup wireless connections safely and easily at a push of the WPS button
- Easy On/Off Dedicated Wi-Fi button allows users to turn wireless radio on or off
- Powerful Phone App Tether App provides an easy way to manage network setting on your palm
- Intuitive Web UI Helps you set up the router in minutes



### Security

- Guest Network Allow guests to join your Wi-Fi network, while protecting your privacy
- Parental Control Establish restricted access policies for all connected devices
- Encryptions for Secure Network –
   WPA-PSK/WPA2-PSK encryptions provide active defense against security threats for user networks

# Specifications

### Hardware


• Ethernet Ports: 4 10/100Mbps LAN Ports & 1 10/100Mbps WAN Port

· Button: WPS/Reset Button, Wireless On/Off Button, Power On/Off Button

External Power Supply: 12V/1A

• Dimensions (W  $\times$  D  $\times$  H): 9.1 $\times$ 5.7 $\times$ 1.5in (230 $\times$ 144 $\times$ 37mm)

Antenna: 3 × 2.4GHz Antennas
 2 × 5GHz Antennas

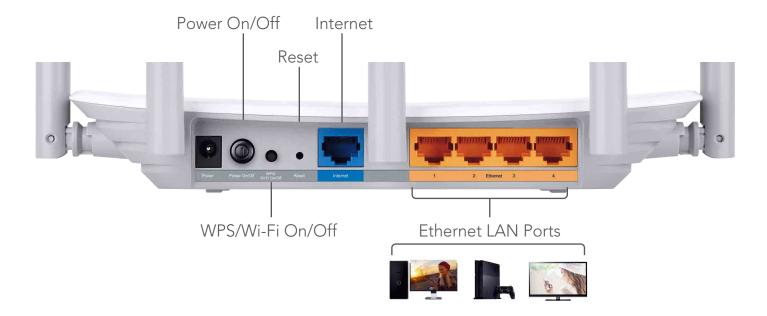

### Wireless

· Wireless Standards: IEEE 802.11ac/n/a 5GHz, IEEE 802.11b/g/n 2.4GHz

• Frequency: 2.4GHz and 5GHz

· Signal Rate: 450Mbps at 2.4GHz, 867Mbps at 5GHz

• Transmit Power: CE: <20dBm(2.4GHz), <20dBm(5GHz)

FCC: <20dBm

Reception Sensitivity: 5GHz: 11a 54M: -76dBm

11ac VHT20 MCS8: -70dBm 11ac VHT40 MCS9: -65.5dBm 11ac VHT80 MCS9: -61.5dBm

2.4G: 11g 54M: -76dBm

11n HT20 MCS7: -74dBm 11n HT40 MCS7: -71dBm

· Wireless Function: Enable/Disable Wireless Radio, WDS Bridge, WMM,

Wireless Statistics

Wireless Security: 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA-PSK2

encryptions

# Specifications

### Software

- WAN Type: Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)/Bigpond
- · DHCP: Server, Client, DHCP Client List, Address Reservation
- · Quality of Service: WMM, Bandwidth Control
- · Port Forwarding: Virtual Server, Port Triggering, UPnP, DMZ
- Dynamic DNS: DynDns, NO-IP
- · VPN Passthrough: PPTP, L2TP, IPSec
- Access Control: Parental Control, Local Management Control, Host list, Access Schedule, Rule Management
- Firewall Security: DoS, SPI Firewall, IP Address Filter/Domain Filter, IP and MAC Address Binding
- Protocols: Supports IPv4 and IPv6
- · Management: Access Control, Local Management, Remote Management
- · Guest Network: 2.4GHz guest network x 1, 5GHz guest network x 1

### Others

### **Package Contents**

- · AC1350 Wireless Dual Band Router Archer C60
- · Power Adapter
- · RJ45 Ethernet Cable
- · Quick Installation Guide

#### Certification

· CE, RoHS

### System Requirements


- · Microsoft Windows XP/Vista/7/8/8.1/10, MAC OS, UNIX or Linux
- · Internet Explorer, Firefox, Chrome, Safari or other Java-enabled browsers
- · Cable or DSL or Fiber Modem/Terminal
- · Subscription with an Internet Service Provider (for Internet access)


#### Environment

- · Operating Temperature: 0°C~40°C (32°F ~104°F)
- Storage Temperature:  $-40^{\circ}\text{C} \sim 70^{\circ}\text{C}$  ( $-40^{\circ}\text{F} \sim 158^{\circ}\text{F}$ )
- · Operating Humidity: 10%~90% non-condensing
- · Storage Humidity: 5%~90% non-condensing

# Others

### Ideal to use with

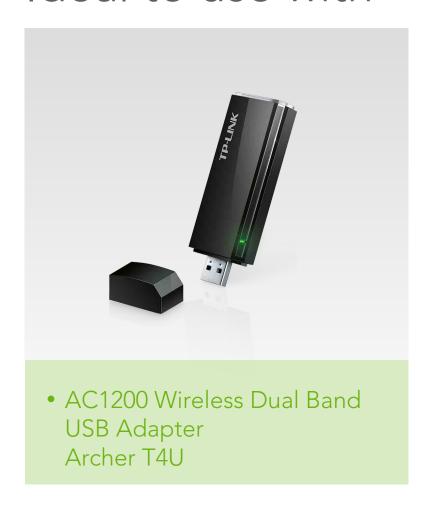

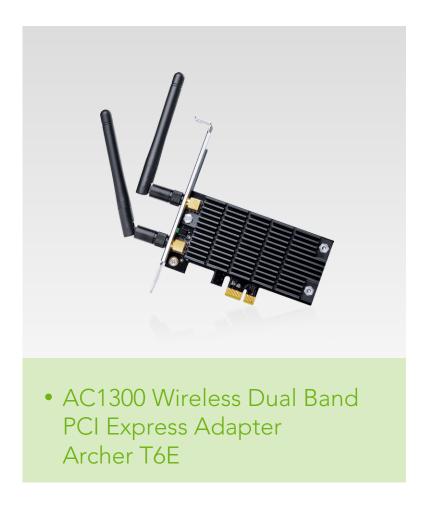

### Similar Products









For more information, please visit

http://www.tp-link.com/en/products/details/cat-9 Archer-C60.html

or scan the QR code left

Specifications are subject to change without notice. TP-LINK is a registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies CO., Ltd.

Maximum wireless speed of up to 1350Mbps is the theoretical data rate derived from IEEE standard 802.11 specifications. Actual data throughput and wireless coverage will vary due to network conditions and environmental factors including volume of network traffic, building materials and construction, network overhead, actual data throughput rate, and wireless coverage. TP-LINK makes no express or implied representations or warranties about this product's compatibility with any future standards.

www.tp-link.com