



Turbo mode

When the air conditioner goes into Turbo mode, it will maximize its cooling or heating capacity, making the room cooler or warmer rapidly.



I FEEL

The remote control can keep track of the temperature at its current location and send the signal to the air conditioner, so it can optimize the room temperature for your maximum comfort.



Anti-fungus

The air conditioner will start the Anti-fungus feature after exiting cooling and dehumidifying mode. It helps prevent fungi and bacteria from spreading in order to maintain a healthy environment.



Horizontal swing

You can use the horizontal swing feature to adjust the airflow direction, if you prefer the air from the AC to blow sideways.




Intelligent defrosting

If the condenser freezes while in heating mode during the times of low outside temperature, the AC will start intelligent defrosting mode.

Wi-Fi

Wi-Fi feature means that Tesla air conditioner can also be controlled with mobile phones or other smart devices: an option that adds to your everyday convenience and comfort!

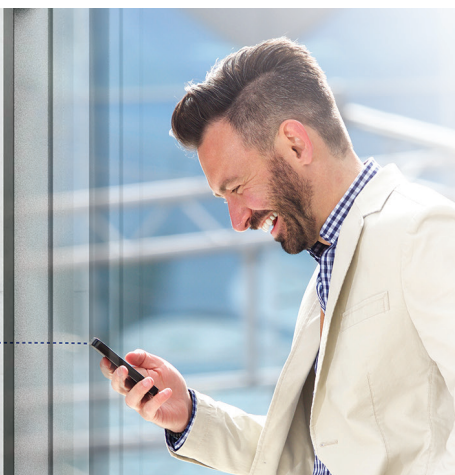



Features

Anti-Fungus function, Self-Cleaning, Self-diagnosis Function, Top plate/cover improved, Super EMC performance, Anti-Rust Cabinet, Intelligent defrosting, Super Quiet design, Backup Switch, Turbo Operation, Hydrophilic Aluminium Fin, Sleep Mode, Fault Code indication, Low Noise Airflow System, Dual Sides Water Outlet, Multiple Fan Speed, Auto-Restart, Timer, Air blade, Washable Filter, Anti-Cold-Air (Heat Pump Only), WIFI, I FEEL and Lysozyme filter

Capacity			24000BTU
Rated volt and frequency		V/Hz	220-240V~/50HZ
Mode			Cooling Heating
Rated capacity		W	6700(1800-7400) 7200(1800-8200)
Power input		W	2200(230-2760) 2200(230-2530)
Current input		A	10.0(1.0-12.0) 9.5(1.0-11.0)
SEER-SCOP/ Energy Class		W/W	6,53/A++ 4,09/A+
Operating range		(°C)	16~49°C -15~30°C
Energy consumption (per year, based on standard test results)		kwh	359 1950
Dehumidifying		Kg/h	2,5
Degree of protection (IN) / (OUT)		(IP)	IPX0/IPX4
Class of electric protection (IN) / (OUT)		Class I / Class II	I/I
Max. input consumption		W	3400
Max. current		A	16
Compressor		Model	C-6RZ146H3DEF
		Type	DC
		Brand	SANYO
Indoor	Fan motor	Model	D-310-50-8A
		Power input	W
		Capacity	uF
		Indoor Fan Speed RPM	1330/1280/1090/900
	Indoor fan	Dia. / Length	mm
	Indoor Air Circulation		m³/h
	Indoor Noise Level dB		dB(A)
	Net Dimension (L×W×H)		mm
	Packing Dimension (L×W×H)		mm
	Net Weight/Gross Weight		Kg
Outdoor	Fan motor	Model	D-65-10A
		Power input	W
		Capacity	uF
		Outdoor Fan Speed RPM	800/700/400
	Outdoor fan	Length	mm
	Outdoor Noise Level dB		dB(A)
	Net Dimension (L×W×H)		mm
	Packing Dimension (L×W×H)		mm
	Net Weight/Gross Weight		Kg
	Refrigerant type/weight		g
Refrigerant piping		Max. Discharge/Max. Suction pressure	Mpa
		Liquid side / Gas side	mm
		Max. refrigerant pipe length / Max. difference in level	m