



Technical Specifications

HP EliteDisplay E273 27-inch Monitor

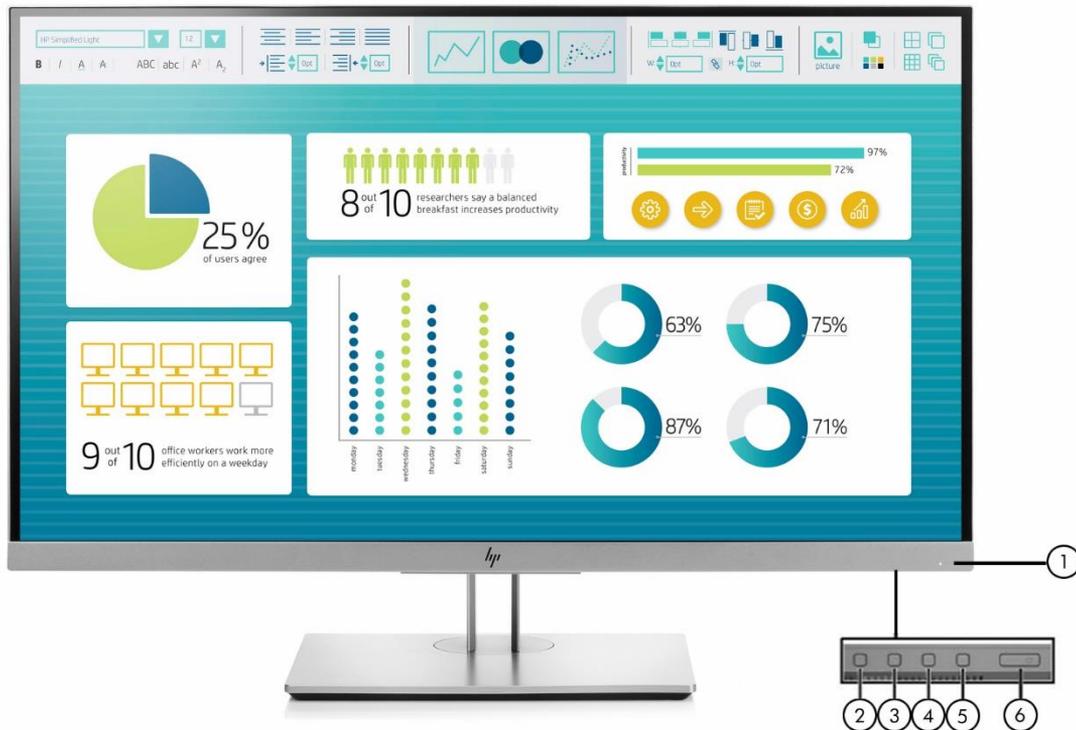

- 1. Power light** LED:
fully powered = white
sleep mode = amber
sleep timer mode = flashing amber
- 2. Menu** Press to open the OSD menu, select a menu item from the OSD, or close the OSD menu.
- 3-5. Function buttons** Use these buttons to navigate through the OSD menu based on the indicators next to the buttons that are activated while the OSD menu is open.
- 6. Power button** Turns the monitor on or off.

Technical Specifications

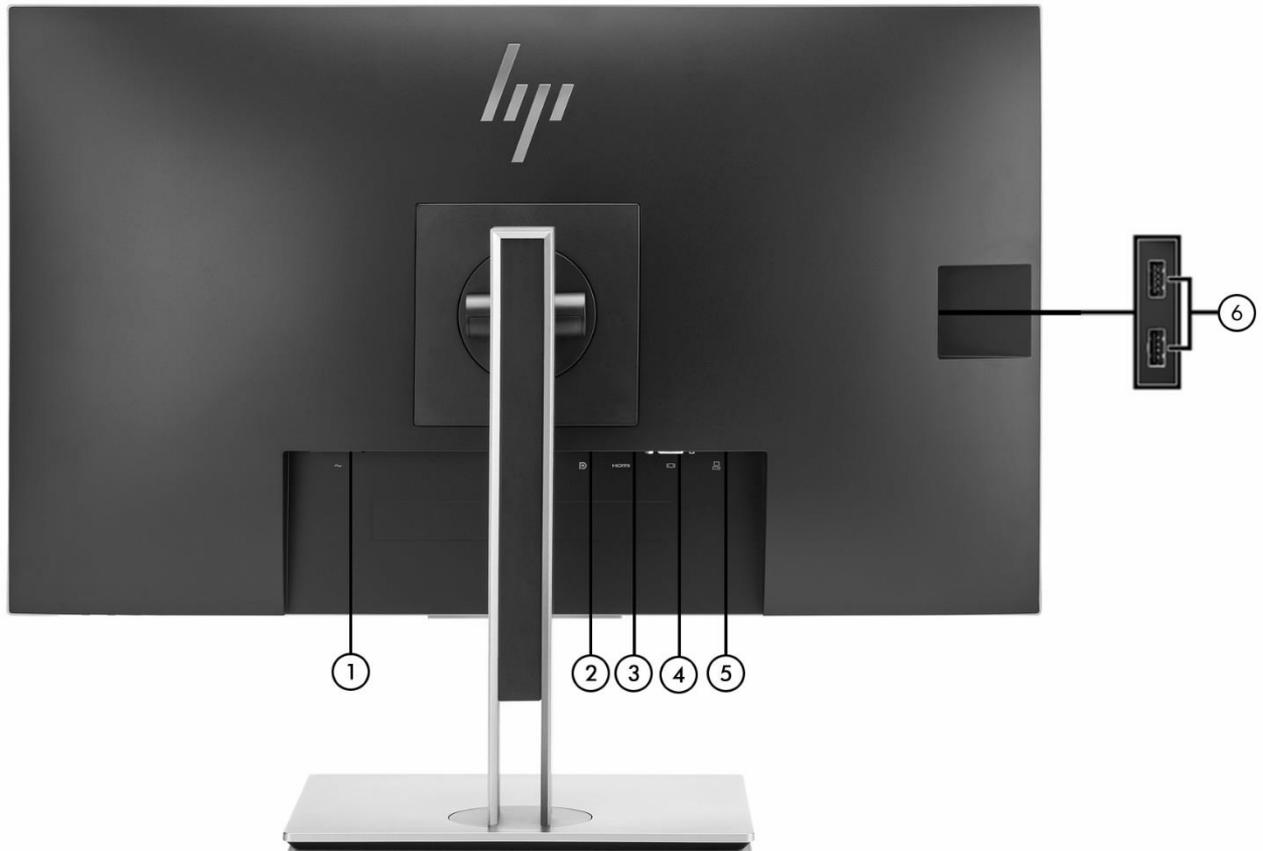

1. **Power connector**
2. **DisplayPort™ 1.2 (input) port**
3. **HDMI 1.4**
4. **VGA**
5. **USB 3.0 upstream**
6. **USB 3.0 downstream ports**

Technical Specifications

Models	1FH50AA, 1FH50AC, 1FH50AS, 1FH50AT, 1FH50A8, 1FH50U9	
Panel*	Type Viewable Image Area (diagonal) Panel Active Area (W x H) Panel Type Resolution Aspect Ratio Viewing Angle (typical) Brightness (typical) Contrast Ratio (typical) Dynamic Contrast Ratio (typical) Response Time (typical)*** Pixel Pitch* Pixel Per Inch (PPI) Backlight Lamp Life (to half brightness) Color Support** Color Gamut Surface Hardness Flicker Free Low Blue Light Capable Anti-Glare	27-inch IPS, Micro Edge LED Backlit 68,5 cm (27 in) widescreen; diagonally measured 59,79 x 33,63 cm (23.54 x 13.24 in.) IPS 1920 x 1080 @ 60 Hz 16:9 Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio) 250 cd/m ² 1,000:1 5,000,000:1 5 ms 0.3114 mm 81.59 30,000 hours minimum Up to 16.7 million colors with the use of FRC technology (8 bit) NTSC 72%, 94% sRGB 3H Yes Yes, user selectable in OSD menu Yes
	*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. ** With the use of FRC technology. ***Product default is 14ms response time and can be adjusted to as low as 5ms in the display menu. See user guide for more information.	
User Controls	On Screen Display (OSD) User Controls Monitor Control Buttons or Switches User-Assignable Function Buttons Languages	Brightness, Contrast, Color Control, Input Control, Image Control, Power Control, OSD Menu Control, Management, Language, Information Menu, Information/Auto-Adjust (assignable), Viewing Mode (assignable), Next Active Input (assignable) Yes, 12 10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
Signal Interface/Performance	Horizontal Frequency Vertical Frequency Native Resolution Preset VESA Graphic Modes (non-interlaced)	30 - 80 kHz 50 - 60 Hz 1920 x 1080 @ 60 Hz 640 x 480 @ 60Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz

Technical Specifications

	Maximum Pixel Clock Speed	170 MHz (VGA, DisplayPort, HDMI)
	Default Color Temperature	Neutral (6500)
VIDEO/OTHER INPUTS		
Connector Types	DisplayPort™	(1) DisplayPort™ 1.2
	HDMI	(1) HDMI 1.4
	VGA	(1) VGA
	HDCP support	Yes, HDMI and DisplayPort™
	Audio	N/A
USB Port Specifications	USB Version	3.0
Cables Included	USB Ports	(3) USB 3.0 ports (2 downstream and 1 upstream)
	Video Cables Included	(1) VGA 1,8 m (5.9 ft), (1) DisplayPort™ 1,8 m (5.9 ft)
	USB Cables Included	(1) USB B to A cable 1,8 m (5.9 ft)
Power	Power Supply	Internal
	Input Power	100 – 240 VAC at 50/60 Hz
	Typical Power¹	25 W
	Maximum Power²	42 W
	Energy Saving/Standby Mode	0.3 W
	Power Cable Length	1,9 m (6.2 ft)
	EU Energy Efficiency Class (EC1062) Report and Fiche	Class A+
DIMENSIONS AND WEIGHT		
Mechanical	Dimensions (W x D x H)	Unpacked w/stand (highest setting) 61,09 x 21,39 x 52,26 cm (24.1 x 8.4 x 20.6 in)
		Unpacked w/o stand (head only) 61,09 x 5,02 x 36,4 cm (24.1 x 2.0 x 14.3 in)
		Packaged 70,7 x 28,2x 44,6 cm (27.8 x 11.1 x 17.6 in)
	Weight	Head Only 4,48 kg (9.9 lb)
		Unpacked 7,1 kg (15.7 lb)
		Packaged 9,8 kg (21.6 lb)
MONITOR FEATURES		
	Plug and Play	Yes
	Color	Silver on facing bezel, side frame, column stand and foot; black on rear cover and stand center trim
	Cable Management	Yes, integrated into column stand. Effortlessly route cables through the column stand for easy management of power, video, and USB cables.
	Detachable Stand	Yes, ships detached
	Tilt Range	-5° to + 22° vertical
	Swivel Range	45°L to 45°R
	Display height adjustment:	Adjustment Range: 150 mm
	Pivot Rotation	Yes, 90° clockwise and counter-clockwise
	VESA Mounting	Yes, 100 mm with integrated mount (included)
	Security Lock-Ready	Yes

Technical Specifications

ENVIRONMENTAL

Specifications	Temperature - Operating	5° to 35° C (41° to 95° F)
	Temperature - Non-operating	-20° to 60° C (-4° to 140° F)
	Humidity - Operating	20% to 80% Relative Humidity non-condensing
	Humidity - Non-operating	5% to 95%, 38.7° C max wet-bulb
	Altitude - Operating	0 to 5,000 m (0 to 16,404 ft)
	Altitude - Non-operating	0 to 12,192 m (0 to 40,000 ft)
	White LED Backlights	Yes
	CCFL Panel	No
	Arsenic-Free Display Glass	Yes
	Low Halogen³	Yes (except cables)
	Mercury-Free Display Backlights	Yes

OPTIONS (Each sold separately)

HP Single Monitor Arm — BT861AA	The flexible design of the HP Single Monitor Arm provides a seemingly endless range of display adjustments with an amazing 13 inches of lift, 50 degrees of tilt, and 360 degrees of pan and rotation – all at your fingertips -- helping you stay comfortable and productive throughout the day.
HP B300 PC Mounting Bracket — 2DW53AA	Attach your HP Workstation, HP Desktop Mini, HP Chromebox or select HP Thin Client directly behind select 2017 and 2018 HP EliteDisplays and HP Z Displays with the HP B300 PC Mounting Bracket. ⁷
HP S100 Speaker Bar — 2LC49AA	Add rich stereo sound to select 2017 and 2018 HP ProDisplays, HP EliteDisplays, and HP Z Displays ⁷ without crowding your desk with the HP S100 Speaker Bar, which fits neatly underneath the display head and connects through USB.
HP HDMI Standard Cable Kit — T6F94AA	Use the cable to connect your desktop to your standard HDMI devices and displays.
HP Quick Release Bracket — EM870AA⁶	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or mounts. For more information, refer to this product's QuickSpecs document.
HP Integrated Work Center for Desktop Mini and Thin Client — G1V61AA	Designed to provide convenient access to the Desktop Mini and select Thin Clients to help maximize the use of limited desk space without compromising performance or productivity. It will support many HP 17 to 24-inch diagonal LCD monitors, with VESA standard mounting brackets. For more information, refer to this product's QuickSpecs document.

Technical Specifications

WHAT'S IN THE BOX?

What's in the box?	Monitor and Accessories	HP EliteDisplay E273 27-inch Monitor, AC power cord, HDMI cable (1.8 m length), VGA cable, DisplayPort™ 1.2 cable, USB B to A cable
	Documentation	CD, documentation
Other	Software included	HP Display Assistant
	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Country of Origin	China

CERTIFICATION AND COMPLIANCE

Certification and Compliance	ENERGY STAR®, EPEAT® 2019 Registered ⁴ , CEL, Microsoft WHQL Certification (Windows 7, 10), TCO Certified Edge, SmartWay Transport Partnership (NA SKU), CE, CB, KC, KCC, NOM, PSB, ICE, TUV-S, ISO 9241-307, EAC, UL, CSA, PSB, ISC, CCC, CECP, ISC, VCCI, FCC, BSMI, Vietnam MEPS, ANZ MEPS, WEEE
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	Protected by HP, including a 3-year standard limited warranty. Optional HP Care Pack Services are extended service contracts that extend your protection beyond the standard warranties. ⁵

Technical Specifications

Copyright © 2019 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

1. Default Power is measured with factory defaults, including factory default brightness and USB ports loaded at 25% of maximum.
2. Maximum Power is measured with monitor at maximum brightness and with USB ports loaded at 100% of maximum.
3. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
4. Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit <http://www.epeat.net> for more information.
5. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See <http://www.hp.com/go/cpc> for details.
6. The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.
7. Sold separately. See product QuickSpecs for exact device and display compatibility.

